



# DESMI Ocean Guard CompactClean

Ballast Water  
Management System

Marine


**DESMI**  
Make life flow



# Compact BWMS for global shipping

- IMO & USCG Approved
- Low holding time
- Chemical Free Treatment
- Down to UV-transmission of just 35% in IMO waters and 40% in USCG territory
- No salinity or temperature limitations
- Automatic flow control and lamp dimming
- Very low footprint
- Multipurpose Backflush/Recirculation/Stripping pump included
- No water cooling or compressed air system required
- Easy to maintain and Worldwide Service Network available



An aerial photograph of a large cargo ship and a smaller tugboat in the ocean. The cargo ship is on the left, with a green deck and a white superstructure. The tugboat is in the center, moving towards the right. The water is dark blue with whitecaps. A blue and green wavy graphic is overlaid on the right side of the image.

Ballast water management systems (BWMS) are a key contribution to healthy seas – and efficient, compact, and truly global systems keep businesses healthy, too.

With the CompactClean BWMS from DESMI Ocean Guard, you get very low system footprint, plus flow rates that match the requirements of even large vessels. The system comes in several variants that can be installed quickly.

Because it complies with IMO and US Coast Guard regulations, CompactClean is easy to use all over the world. And because it relies on UV light, it is harmless to crews but highly effective against microorganisms, helping you protect marine ecosystems at every port of call and keep international trade flowing.



# Simple operation with one global mode

By choosing a CompactClean BWMS you will experience simplicity in the daily operation of your vessel. One global full flow mode worldwide - as simple as that! The solution has superior UV power to meet the strict requirements for ballast operation in US-waters.

## No special USCG mode required

The selection of either IMO or US mode can be very complicated, if the operator does not know at the time of uptake, where the ballast water is going to be discharged.

With the CompactClean system you will not need a special mode to comply with USCG requirements. You just have one global mode for worldwide operation. The advantage of using a single operation mode globally is that it removes the need to know the de-ballast location at the time of ballast uptake. This means the ship can never get into a situation where the ballast water on board is compliant for discharge in one location, but not in another.

The CompactClean has been certified to treat ballast water with UV transmission at record-breaking 40% in its global mode. Most competing systems will go out of compliance as early as 70% UV-T in USCG waters.



CompactClean 135



CompactClean 35

# Selecting the right CompactClean

The CompactClean BWMS is available in following sizes (treatment rated capacities):

CompactClean (model)	Max flow (Global mode) Ballast [m <sup>3</sup> /h]	Max flow (Global mode) De-ballast [m <sup>3</sup> /h]
35	35	40
85	85	85
135	135	160
250	250	250
340	340	340
500	500	500
750	770	870
1000	1040	1180
1500	1500	1740

Max treatment: CompactClean-1000 (example)	
IMO Ballast	1040 m <sup>3</sup> /hr
IMO De-Ballast	1180 m <sup>3</sup> /hr
USCG Ballast	1040 m <sup>3</sup> /hr
USCG De-Ballast	1180 m <sup>3</sup> /hr

Specifications:	
UV reactor size	144 kW
Filter size	1000 m <sup>3</sup> /hr
Main pipe dim.	DN350



# CompactClean OptIMO

The CompactClean OptIMO BWMS has been designed for vessels trading globally or primarily in IMO regulated waters. The CompactClean OptIMO BWMS provides optimized performance in IMO waters combined with strong performance in US territories. The CompactClean OptIMO system is designed and tested according to the MPN testing methods under IMO. It means that the CompactClean OptIMO BWMS deploys an optimized and energy saving UV reactor to treat the ballast water, based on the same proven and high-quality technology as the well-known DESMI CompactClean BWMS. This is proved by the CAPEX and OPEX savings. Dual mode software: IMO and USCG mode Even though CompactClean OptIMO BWMS is optimized for full flow in IMO waters, it can also be used in USCG waters with similar very strong performances. The dual-mode software takes care of the correct treatment scheme after the operator chooses the operation mode. The destination port will determine whether the system should operate in IMO or USCG mode. CompactClean OptIMO can, like CompactClean, handle water with low UV transmissions rates of just 40% in US territory. Furthermore, CompactClean OptIMO has been certified to treat ballast water with UV transmission at record-breaking 35% in IMO mode.



CompactClean OptIMO 1000

The CompactClean OptIMO BWMS is available in following sizes (treatment rated capacities):

CompactClean OptIMO (model)	Max flow (IMO mode) Ballast [m <sup>3</sup> /h]	Max flow (IMO mode) De-ballast [m <sup>3</sup> /h]	Max flow (USCG mode) Ballast [m <sup>3</sup> /h]	Max flow (USCG mode) De-ballast [m <sup>3</sup> /h]	Max flow (USCG Flow fresh water) [m <sup>3</sup> /h]
50	50	60	50	52	40
55	55	60	52	52	40
100	100	135	111	111	85
135	135	135	111	111	85
170	170	240	170	208	160
190	190	240	190	208	160
340	340	370	325	325	250
500	510	510	442	442	340
750	750	750	650	650	500
1000	1040	1200	1040	1131	870
1500	1500	1650	1500	1534	1180
2100	2100	2500	2100	2262	1740

**Max treatment:** CompactClean OptIMO 1000 (example)

IMO Ballast	1040 m <sup>3</sup> /hr
IMO De-Ballast	1200 m <sup>3</sup> /hr
USCG Ballast	1040 m <sup>3</sup> /hr
USCG De-Ballast	1131 m <sup>3</sup> /hr

**Specifications:**

UV reactor size	108 kW
Filter size	1040 m <sup>3</sup> /hr
Main pipe dim.	DN300

# CompactClean Bulker


The CompactClean Bulker BWMS is the CAPEX competitive choice for operators in the dry bulk segment. The CompactClean Bulker BWMS provides you exactly the flexibility that you need and deploys the same proven principles and quality as the CompactClean and CompactClean OptIMO.

Typically, it takes a bulk carrier longer to unload its cargo than to load it. Thus, the de-ballast operation is often carried out at a higher flowrate since two (or more) pumps will operate during de-ballasting while one pump is operated during ballasting. Since the mechanical filtration process is by-passed during de-ballast, the CompactClean Bulker is installed with a smaller filter compared to the UV capacity. This will have a significant effect on the CAPEX and OPEX.

The CompactClean Bulker system uses the same dual mode design as the CompactClean OptIMO solution and therefore offers the same treatment capacity down to 35% UV-T in IMO mode. Furthermore, the CompactClean Bulker solution offers all the same benefits as our usual, high quality solutions - from fully automated operation to low footprint and more.

*The CompactClean Bulker BWMS is available in following sizes (treatment rated capacities):*

CompactClean Bulker (model)	Max flow (Both modes) Ballast [m <sup>3</sup> /h]	Max flow (IMO mode) De-ballast [m <sup>3</sup> /h]	Max flow (USCG mode) De-ballast [m <sup>3</sup> /h]
135-340	135	370	325
190-340	190	370	325
135-500	135	510	442
190-500	190	510	442
250-500	255	510	442
250-750	255	750	650
340-750	340	750	650
340-1000	340	1200	1040
500-1000	515	1200	1040
500-1500	515	1650	1534
750-1500	770	1650	1534
750-2100	770	2500	2262
1000-2100	1040	2500	2262

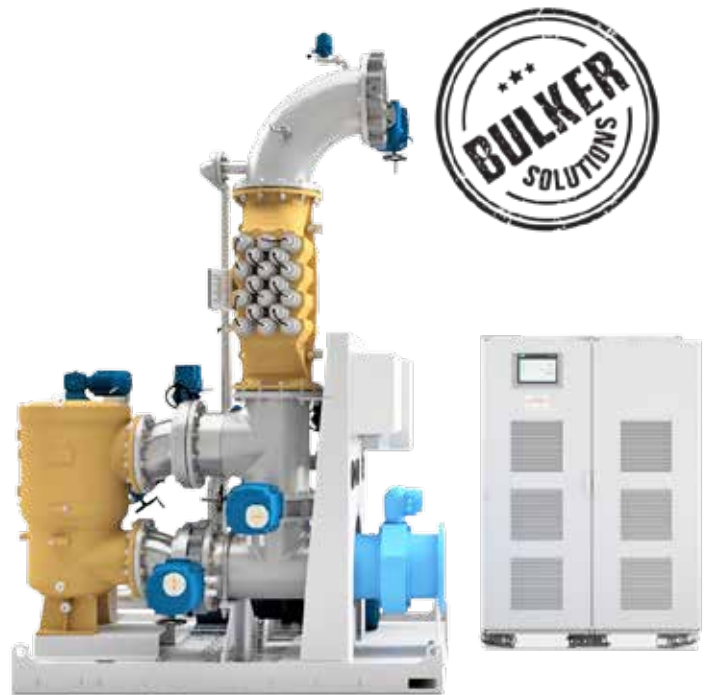

CompactClean Bulker 500-1000

### Max treatment: CompactClean Bulker 500-1000 (example)

IMO Ballast	515 m <sup>3</sup> /hr
IMO De-Ballast	1200 m <sup>3</sup> /hr
USCG Ballast	515 m <sup>3</sup> /hr
USCG De-Ballast	1040 m <sup>3</sup> /hr

### Specifications:

UV reactor size	108 kW
Filter size	515 m <sup>3</sup> /hr
Main pipe dim.	DN300




Performance

# System Features

## Easy Reporting to Authorities

Automatic generation of PDF reports to authorities, documenting the performed treatment. With the IMO convention in force, vessel owners will experience increasing demands from authorities for documentation of performed ballast water management. Therefore, CompactClean features automatic generation of PDF reports that document the ballast water operations performed, including key parameters monitored during the treatment. The PDF files are automatically stored and can be transferred to a USB memory stick when inserted into the front of the electrical panel.

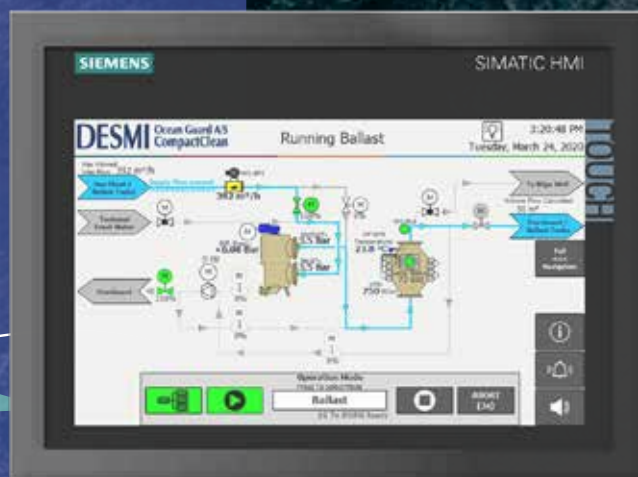



### Smooth Port Operations


*Automatic adjustment of treatment in order to cope with extremely challenging water, avoiding alarms and interrupted port operations in dirty and challenging water conditions.*

CompactClean does not raise an “out of compliance” warning in very dirty water conditions, instead it automatically reduces flow through the system to ensure compliant treatment even under low UV-T conditions. This enables the vessel to carry on with its port operations instead of forcing the vessel to interrupt the ballast water discharge, and you will save costs relating to delays in harbour.

### High Efficiency Keeps your OPEX Down

*UV unit design with very high treatment efficiency reduces the power consumption.*

The special shapes of the CompactClean UV chambers have been developed and optimised on the basis of hundreds of state-of-the-art CFD simulations. This ensures that each kW of generated UV light is utilized to the max, which enables lower power consumption.

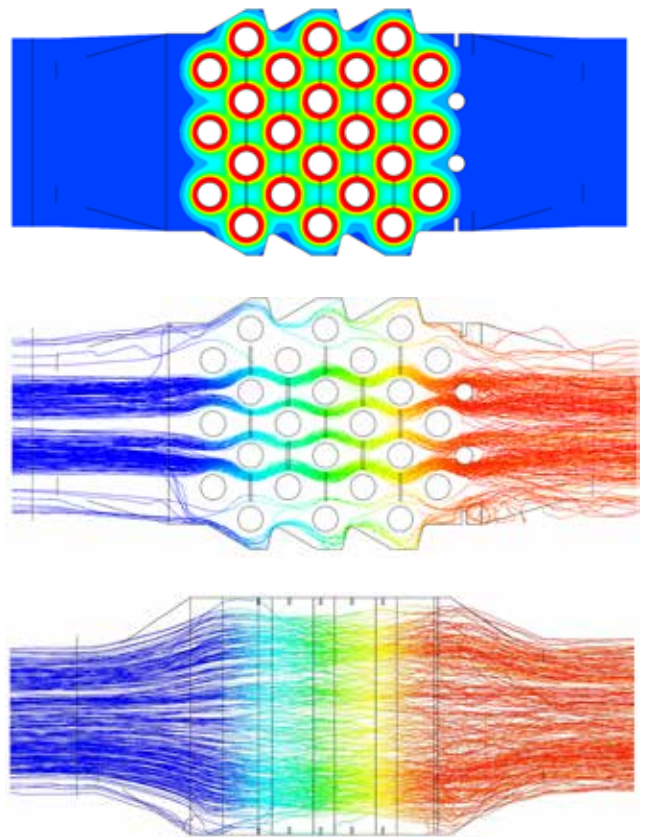

### Integrated and Compliant Solution for Ballast Stripping Operations

*The CompactClean filter back flush pump can be used as stripping pump during stripping of ballast tanks.*

Use of ejectors for stripping of ballast tanks jeopardizes compliance with the IMO and USCG discharge standards, because untreated drive water is mixed with treated ballast water. In addition, the untreated drive water can introduce significant wear and tear of the system components. As the only system in the world, CompactClean ensures smooth start up and cool down by recirculating the water in the system, thus to avoid operating the ballast pumps when starting and stopping the system. Further, the same recirculation loop is used for cleaning of the system i.e. One system, one pump: four problems solved!

### Fully Automated with Easy Integration into Ship Automation System

*CompactClean is PLC controlled and supports all generally used main types of communication interfaces.*

With CompactClean the crew on board the vessel will hardly notice that they are treating the ballast water. The system is fully automatic and can be seamlessly integrated with already existing systems on the vessel. When wanting to

take ballast water on board, press the “Start Ballast” button on the touch screen, and when discharging the ballast water press the “Start De-ballast” button on the touch screen. That’s how simple it should be – that’s how simple it is!

### Long Lifetime of Components Gives you Reliable Treatment and Low OPEX

*UV unit made of Nickel-Alu-Bronze material with superior corrosion resistance and proven very long lifetime.*

The CompactClean UV units are made of cast Nickel-Alu-Bronze with proven sea-water corrosion resistance. DESMI has decades of good experience with sea water pumps in the same material: Proven Technology keeps the downtime and maintenance costs to a minimum!



# UV Transmission

The unique UV unit is designed and manufactured by DESMI. The special shape ensures the highest possible applied UV dose to all organisms in the treated water.


This enables IMO and USCG compliant management under even very adverse conditions with low UV transmission. The CompactClean UV unit is delivered in 9 sizes with max flow rate from 35 m<sup>3</sup>/h to 2500 m<sup>3</sup>/h.



CompactClean UV unit for 340 m<sup>3</sup>/h



CompactClean UV unit for 750 m<sup>3</sup>/h

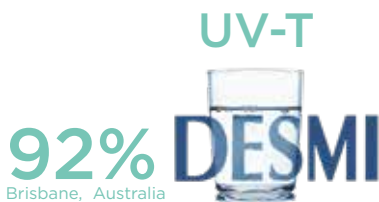

Down to a UV-transmission of just 40% world-wide or record-breaking 35% in IMO waters

The CompactClean BWMS has both IMO and USCG type approval, and the BWMS operates in the exact same way both inside and outside US Territory at record-breaking low UV transmission values! This enables compliant performance anywhere in the world in even very dirty and challenging water conditions. System optimized for IMO performance is also available. This superior performance comes from the unique shape of the UV chamber, which has been carefully developed and optimised through hundreds of state-of-the-art CFD (Computational Fluid Dynamics) simulations.

## What is UV transmission?

UV-T is a measure of the capability of UV light to penetrate water. When the UV-T is high, close to 100%, the water is very clear, and the UV light can penetrate deep into the water. On the other hand, when the UV-T is low, the water is very unclear, and the UV light can only penetrate a limited distance into the water.

Clearly, the UV-T of the water to be treated is of utmost importance. To kill or render an organism nonviable, a certain UV dose is required, and the applied UV dose is directly proportional with the UV intensity. Therefore, when the UV-T is low, significantly more UV power is needed to treat the water according to the required discharge standards.

## Limitations of Ballast Water Management Systems

It should be acknowledged that all BWMS have limitations. Typically, chemical systems (e.g. electrochlorination) have limitations related to the salinity of the water to be treated, its temperature or the amount of organic material contained in the water; whereas UV based BWMS have limitations with regard to the UV transmission of the water to be treated. In other words, all BWMS have special circumstances under which they cannot be expected to treat the water according to the IMO and USCG discharge standard. The trick for the ship owner is to select a BWMS that will work under normal operational conditions.

## UV Transmission of Ballast Water

The UV-T found in different ports around the world varies significantly. Some ports are located at river estuaries, which means that the water in the port is fresh water containing high amounts of sediments, organic particles, and dissolved organic compounds. This makes the UV-T very low. Other ports are located on islands in the middle of an ocean, and here the UV-T is typically high. In the same port the UV-T can vary from day to day depending on tide, weather (rain and strong wind), and season.



The CompactClean system has proven to work even in the most challenging conditions. An example is in the Yangtze river, where ballast reports from the system log that we are treating this extremely challenging water at 76% of the Treated Rated Capacity (TRC), meaning a CompactClean-1000 system will treat 760 m<sup>3</sup>/h. BWMS reports can be shared on request.

Port	UV-T	Port	UV-T
Istanbul, Turkey	95%	Charleston, SC, USA	84%
San Pedro, CA, USA	95%	Tanjung Pelepas, Malaysia	83%
Vera Cruz, Mexico	94%	Baltimore, MD, USA	83%
Halifax, NS, Canada	94%	Hong Kong, China	80%
Rotterdam, Netherlands	93%	Houston, TX, USA	74%
Port of Singapore	93 %	Hamburg, Germany	69%
Skagen, Denmark	92%	Antwerp, Belgium	66 %
Brisbane, Australia	92%	Bremerhaven, Germany	60 %
Porto Grande, Cape Verde	92%	Shanghai, China*	55 %
Wallhamn, Sweden	91%	New Orleans, USA	54 %
Houghton, MI, USA	91%	Lisbon, Portugal*	53 %
Melbourne, Australia	87%	Brunswick, GA, USA	51 %
Erie, PA, USA	87%	Southampton, England	51 %
Zeebrugge, Belgium	85%	Shanghai, China*	49 %
Gothenburg, Sweden	85%	Lisbon, Portugal*	41 %

\* In the same port the UV-T can vary from day to day depending on tide, weather (rain and strong wind), and season. Source: DHI & DESMI Ocean Guard

# Safety on Board any ship

- Including Oil and  
Chemical Tankers



The CompactClean system is available in an ATEX and IECEx version with flowrates from 250 m<sup>3</sup>/hr, making installation in hazardous zones on board oil, chemical or gas tankers possible. The EX certification notation is:

## Ex II 2G Ex IIB/IIC T4 Gb


and is based on the following components:

- UV sensor: Ex ia
- Temperature: Ex ia
- Pressure: Ex ia
- Water level: Ex ia
- Junction Box: Ex d
- Valves: Ex d
- Motors: Ex d
- UV lamp assembly: Ex d
- Pumps (mechanical ATEX approval)
- Flow meter: Ex d ia [ia]


DESMI guarantees a distance of up to 100 m / 328 ft. between the main panel and the Ballast Water Management System.





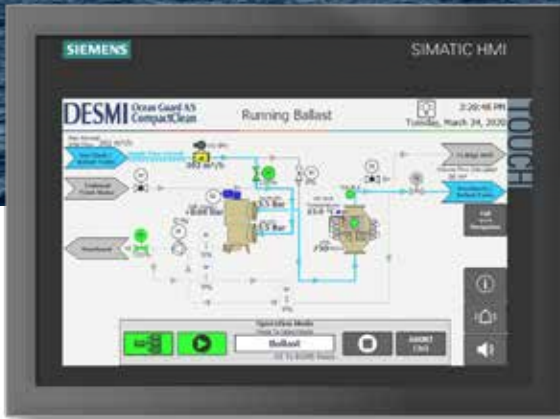

9" HMI Screen  
- System in Ballast mode

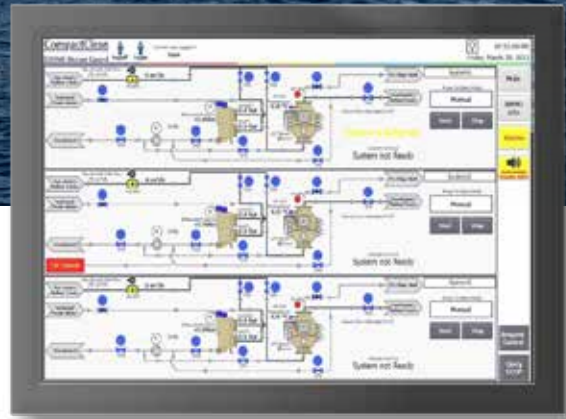

15" HMI Screen  
- Split screen view, showing three systems

The CompactClean is delivered with a standard electrical panel and HMI screen. Additional remote HMI screens, interfaces, and customized layouts can be added

The BWMS is delivered with an air-cooled main panel that can be placed in any convenient place. The main panel is equipped with an HMI screen, from which the system is controlled, and alarms visualized.

All operations can be done and monitored from additional remote HMI screens in the deck control office or from the bridge, if option for installing remote control screens is used.

**Standard fully automated operating modes for treatment are:**

- Ballast
- Deballast
- Stripping
- Cleaning In Place

**Other automated modes which can be selected are:**

- Water Filling
- Recirculation


On the HMI screen, the operator can switch between several screen views (main page, active alarms, alarm history, P&ID page, and UV drivers) to display all relevant information. During operation, the status of all components and sensors can be monitored, and operational values such as flow, pressure, temperature and UV intensity can be viewed instantaneously; and trend curves can be displayed to see the development over time.

# System Configurations



## Loose Component Delivery

The loose component configuration provides maximum flexibility in terms of deployment. This is the typical choice for retrofit projects as all components freely can be placed where there is enough room for them. This configuration contains all components except electrical wiring and pipe spools, which will be customized for the vessel.

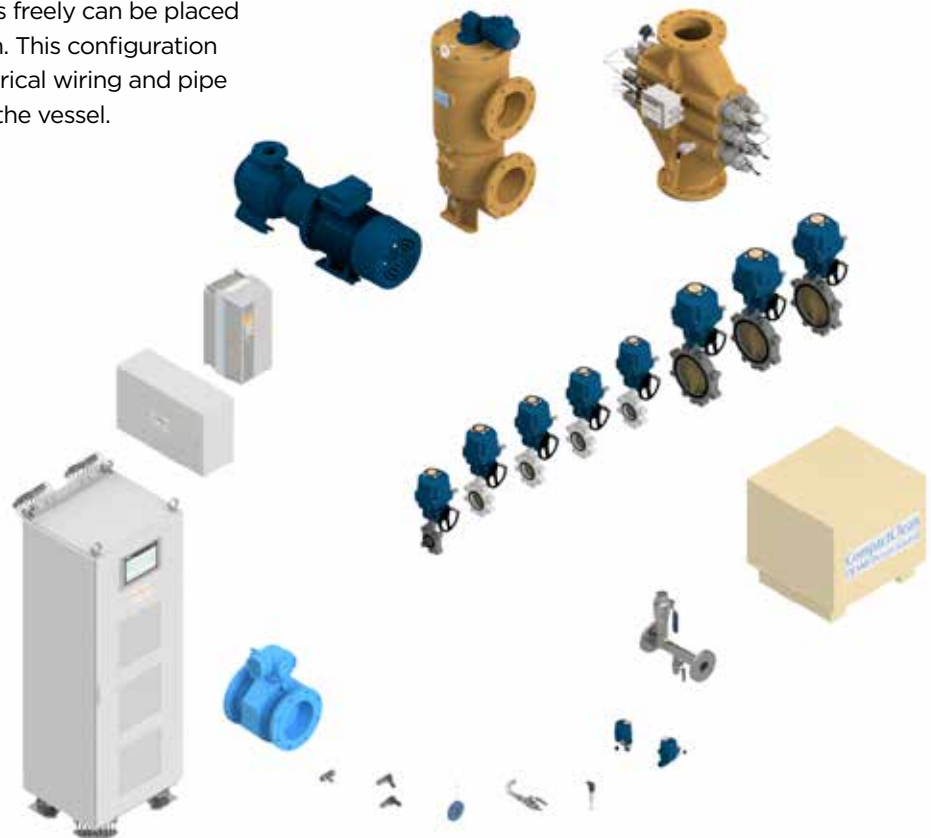



The CompactClean system can be ordered in three different configurations as shown below. The three configurations are available in both a Non-EX type and an IECEx type of systems for safe zone and hazardous zone installations, respectively.

### Skid Mounted Delivery

The skid mounted configuration is a fully assembled system installed on a skid. The system has been optimized for a very low footprint. This is a plug and play solution, which makes the installation seamless.



### Deck House Delivery

The deck house configuration is designed for vessels with no room for a BWMS below deck. It is typically chemical tankers with submerged ballast pumps that has this challenge. The deck house can be delivered with or without a booster pump. This configuration is plug and play and can easily be installed on deck.

Apple App Store



Google Play Store





Troublefree operation

# Training Packages

DESMI Ocean Guard offers various training packages for CompactClean Ballast Water Management Systems. It is of utmost importance that the crew has been familiarized with the system and has enough knowledge to operate and maintain the system - this ensures problem-free ballast operations.

The training can be tailored to specific needs and is available as onboard training modules, at our shore training facility and/or self-training with our Computer Based Training. Below an overview of various training packages for CompactClean BWMS. For further details please contact your DESMI sales representative.



## On board Training

During commissioning of the system or crew change



## Shore Facility Training

Classroom and hands-on experience for crew and shore personnel



## Computer Based Training

Offline self-training and simulation software

## Service App

The DESMI Ocean Guard Service app has been designed to help the crew operating the CompactClean system. The app provides access to manuals, guides, and FAQ making it easier to maintain and operate the system.

Furthermore, it can give a 3D Augmented Reality View of the system. It then gives the technician the possibility to walk around and inspect a 3D model in front of him. The app is free for download in Google Play and AppStore.

## Computer Based Training (CBT)

The CBT offline training tool allows you to get familiar with the operation of the CompactClean BWMS in a controlled environment on any PC. The CBT is offered free-of-charge to any customers and personnel handling the CompactClean system.

With the CBT training tool, customers have easy access to a complete training course with an inbuilt system simulation, which includes component and system descriptions and troubleshooting and maintenance manuals.



Complete Engineering Packages

# We keep your installation project flowing

## Our BWMS Services

- ✓ Ship Inspections
- ✓ Engineering
- ✓ Delivery of systems
- ✓ Commissioning
- ✓ Service Agreements





We understand how vital it is to get things done right and on time. That is why we stay close to you at every step with tailor-made engineering and installation support services that keep your project flowing – and we offer pre-fabrication, commissioning, and service agreements that ensure flawless BWMS operation.

### **Engineering package**

The engineering package includes finding space for and integrating our CompactClean™ BWMS on your vessel. This includes ship inspection, development of 3D CAD drawings, and generation of production drawings.

### **Phase 1: Scanning, processing and producing a 3D as built environment**

- Work preparation
- Measuring on board (3D laser scanning, 1 day)
- Inspection of possible locations for installation of equipment
- Check tie-in location into existing piping
- Check wire routings, cable penetrations, available space for additional breakers in main switchboard
- Check for structural modifications in case required
- Processing of laser scans after shipboard visit

### **Phase 2: Engineering**

- Concept model of proposed system, modeled in the available space. Delivered as screenshots in a .pdf file
- First proposal of possible lay-out and installation
- Update ballast water diagram to new situation

### **Phase 3: After approval of location of the treatment system by Client:**

- Preparation of documents for Class approval
- Material specification of piping and valves
- Updated ballast water diagram with treatment system included
- Updated Load Balance
- Updated Single Line diagram
- Additional Class requirements will be discussed on case by case basis
- Routing of piping
- Isometric drawings for fabrication of piping including material specification
- Production drawings for all necessary foundations
- Overview drawings for installation
- Part lists of all materials needed for the installation but outside the scope of supply of the CompactClean system, including cable lists, valves, bolts, nuts, gaskets, pipe supports
- Installation guide with instructions



# Type approvals



The CompactClean BWMS is type approved in accordance with the IMO BWMS system code (also referred to as the revised G8), USCG, and multiple classification societies. The BWMS system code has become mandatory for BWMS system installed on vessels after October 2020 and as such in force today!

## Same operating mode all over the world - or optimized performance outside US territory


On the one hand, the CompactClean system does not need a special US operation mode to meet the USCG requirements in US territory, while the system also provides an option for optimized performance outside of US territory.

With just one operation mode used globally, there is no need for knowing the de-ballast location at the time of ballast uptake to determine if the BWMS should be operated in IMO or US mode. Naturally, the selection of either IMO or US mode becomes quite complicated if the

operator does not know where the ballast water he is taking on board is going to be discharged. Having one mode used globally this issue has been solved.

For vessels that never or rarely reach ports in the US, it will be obvious to choose an operating mode that allow for optimized performance.

The CompactClean system accommodate the vessel operating profiles no matter how it may look.

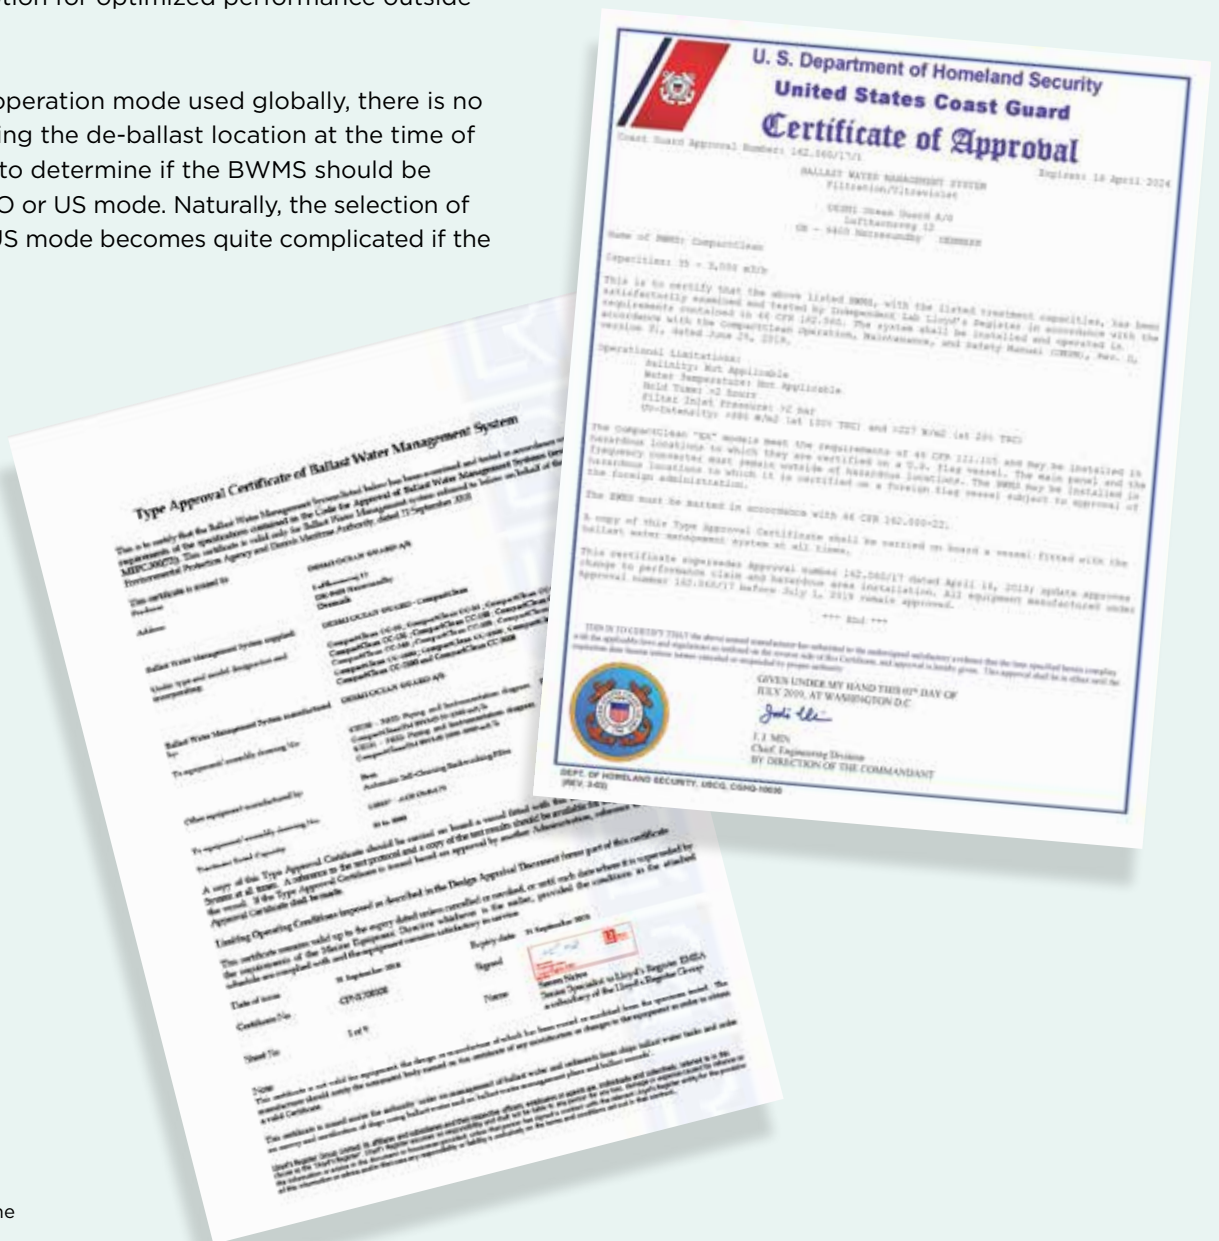



# Several Years Successful Operation on Board **Providana**

Installed in July 2017

The 1000 m<sup>3</sup>/h installation of DESMI Ocean Guard's CompactClean system was conducted in Chengxi Shipyard on the vessel Providana owned by Masterbulk Pte Ltd.

**The installation was a full integration of the system, which included:**

- A full 1000 m<sup>3</sup>/h CompactClean BWMS
- An additional valve package and control system
- Frequency converters on the ballast water pumps
- Deck office operative system
- Internet uplink system

Ship's name	MV "PROVIDANA"
Ship type	General cargo/Container Carrier/ (DNV) I.D. no. 26604
IMO number	9380788
Built	OSHIMA Shipbuilding Co.,Ltd. -Japan / Ship Hull No. 10508
Flag	Singapore
LOA	212.5 metres / 697 feet
GT	39,258 MT
DWT	54,810 MT
Ballast cap.	17,833 MT

We chose DESMI's CompactClean system because of the very small footprint and our trust in DESMI as a well-established supplier of marine equipment.

An installation like this is a large project and requires good cooperation between the owner, technical manager, shipyard, and system supplier. All parties did a professional job in making this BWMS installation a smooth and efficient process.

Kevin Leach-Smith,  
Vice President, Operations, Master-bulk Pte. Ltd.



Much more to our service

# DESMI DeServe: Competent Worldwide Service



Our tailor-made, global services are essential to secure the optimization and long-term performance of your BWMS. We focus on ensuring uptime and availability, with the least hassle and in the shortest timeframe. No matter where you are located, we will always be ready at a moment's notice with the right expertise, spares, and know-how to keep your processes running.

Our DeServe service team operates globally and round the clock. We offer the service you need, from simple advice over the phone to full onsite maintenance and service programs. Our team is highly experienced, factory-trained, and fully capable of meeting your demands.

## **DESMI 48: quick spare part support**

For several spare parts or new equipment, our DESMI 48 fast-track concept means we ship the components you need within 48 hours. Through our global parts database, we can also often locate the necessary part in one of our regional warehouses and ship from day to day, helping you keep operational disruptions to a minimum.

DESMI DeServe offers a wide range of services to your DESMI BWMS system, to ensure easy and trouble-free operation of your system.

We know that not two customers are alike, therefore we also believe that understanding your needs and demands is the key to a long lasting partnership in servicing your DESMI equipment.

Our service program is therefore put together to offer our customers the highest flexibility to meet the expectations of keeping your BWMS system compliant in the most cost-effective way.

---

## Packages


- Pre-commissioning survey
- Yearly compliance survey
- 2,5 years' service
- 5 years' service
- Up-link support
- Training programs





DESMI always strives to provide our customers with the very best service!

That's why we have established DESMI DeServe - your guarantee for an excellent service 24/7/365.

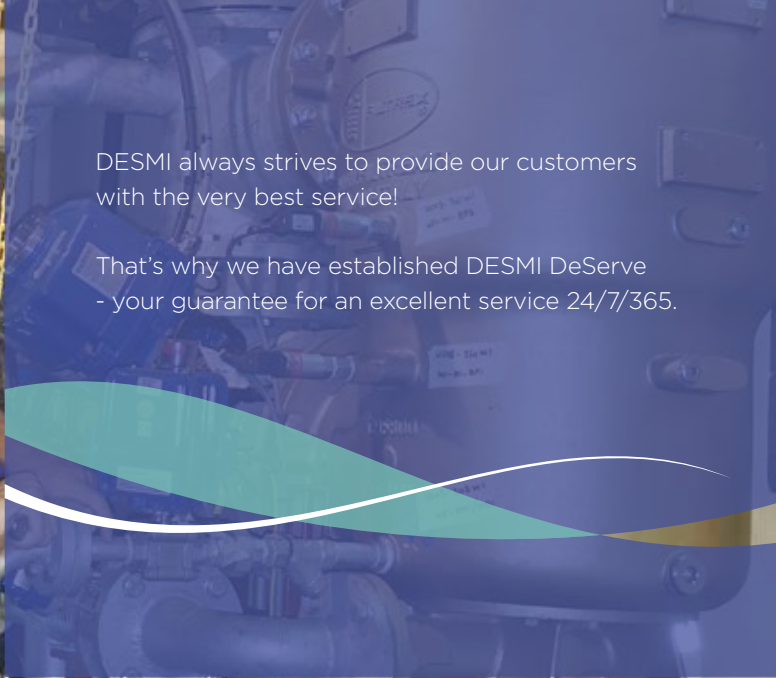

**Our dedicated  
global DESMI  
Service Team  
delivering local  
service**



# We exist to keep your business flowing

DESMI works closely with vessel owners, operators, and shipyards to deliver critical flow processes for diverse marine applications. Our pumps and supporting systems for marine applications, including ballast water management systems, are trusted worldwide for dependability and the lowest total cost of ownership.

No matter which flow challenges you are facing, we can help you overcome them with class-leading equipment, solutions, and services designed specifically for your applications and environment. At DESMI, our focus has never been on discovering what we can do – it's about pushing the boundaries of what we can do for you. We help you operate more efficiently and reliably, enabling your ambitions for performance, compliance, and growth whilst helping you reduce your climate impact.

Together, we can make a difference, whatever the future holds. Because we, like you, are here to **make life flow**.

---

In need of more information or specifications?  
Contact us at [desmi@desmi.com](mailto:desmi@desmi.com) or read more about  
DESMI and DESMI's other products and solutions at  
[www.desmi.com](http://www.desmi.com)

---

## DESMI A/S

Tagholm 1  
DK-9400 Nørresundby  
Tel.: +45 96 32 81 11